



Gas Seal Tape

The original, color-coded, maximum density, Teflon® thread sealing tape developed specially for the gas industry




The Industry Standard
–World Wide

Unasco **Gas Seal** tape is certified by gas authorities world wide. No other thread sealing product – either tape, compound or liquid, has these approvals.




*Teflon is a DuPont registered trademark.

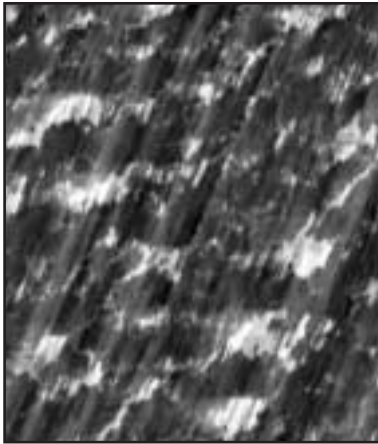

Ordinary Teflon tape

Voids clearly visible as splotches. This tape was 86% void by volume.

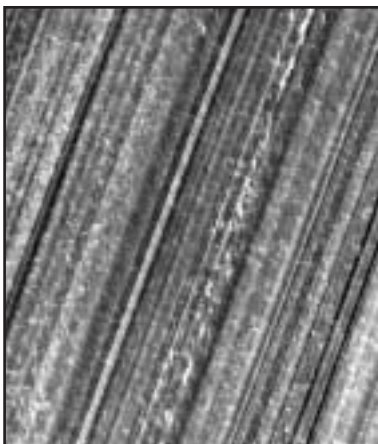

Unasco Gas Seal tape

No voids visible. Striations are as a result of material alignment during extrusion.



Unasco Pty Ltd

1 Amax Avenue, Girraween
NSW 2145 Australia
Phone (02) 9636 1200
Toll Free 1800 224 213
Fax (02) 9688 4831

Suite #5, 921 Transport Way
Petaluma CA 94954
Phone (707) 763 5413
Toll Free 1800 773 5413
Fax (707) 763 5487

What's so special about Unasco Gas Seal tape?

Gas Seal tape is manufactured to the highest density of any Teflon threadsealing tape on the market.

Ordinary Teflon tapes are stretched during the manufacturing process as a cost cutting measure. Stretching reduces the density of a tape by increasing its porosity. It's not unusual to find Teflon tape stretched 600% or more with a void volume greater than 80%. Gas can escape through these pores creating potentially hazardous and costly leaks.

Unasco **Gas Seal** tape is unstretched.

Maximum density Gas Seal tape has significant advantages

- Provides an impenetrable barrier to gases
- Holds higher pressures. Not subject to cold flow or collapse
- Will not string or shred
- Fewer wraps required



Unasco **Gas Seal** tape is thicker than ordinary threadsealing tapes for even greater sealing efficiency and its yellow color coding makes it easy to identify.

Unasco Gas Seal tape is superior to liquid thread sealants

Unlike pipe dope or anaerobic sealants **Gas Seal** tape is clean, non-toxic and has an unlimited shelf life. **Gas Seal** tape is cheaper to use – costing only a few cents per joint.



A size to suit any application

Width	Length	Qty/Pack	Qty/Case
12mm / 0.5in	6.5m / 260in	10	1000
12mm / 0.5in	30m / 1182in	10	490
19mm / 0.75in	6.5m / 260in	6	600
25mm / 1.0in	6.5m / 260in	6	600